

FEATURES

Ramp Access Passenger Side Sliding Door: ADA-compliant manual sliding door provides 56-1/4" vertical opening (with interlock and entrance lighting).

Note: The driver-side sliding door is lowered to provide clear passage also.

Ramp: The ADA-compliant manual swing-out ramp provides 30" usable width.

Lowered Floor from Rear Axle to Toe Pan: This feature provides additional headroom, and further reduces the slope of the ramp. Commercial grade flooring is featured throughout the lowered floor area.

Ground Clearance: The lowered floor results in reduced ground clearance. Be aware of limited ground clearance.

Ground Effects: Exterior ground effect panels conceal the lowered floor and lowered sliding doors.

Forward-Facing Wheelchair Tiedown and Occupant Restraint System: Floor track (anchorage point) provided in the front passenger seat and midpoint lowered floor areas can be utilized for restraint of wheelchair passenger(s). See Figure 1 for anchorage point locations and wheelchair mounting positions (positions A and B).

One Forward-Facing Wheelchair Tiedown and Occupant Re-

straint Belt Kit is supplied for the tie down of one wheelchair and restraint of an occupant. The belt/tiedown kit is used in conjunction with the floor track (anchorage points). Additional restraint systems can be purchased (option).

Note: Wheelchair capacity may be limited based on the dimensions of specific wheelchairs and vehicle payload capacity.

Driver Seat: The OEM driver seat is mounted to a fixed (non-removable) seat base riser.

Quick-Release Front Passenger Seat: The front passenger seat is equipped with quick-release seat base attachments(making seat removal and installation procedures simple).




Midpoint Fold-A-Way Seat: A two-passenger fold-a-way seat is available as a midpoint seating option.

Auxiliary Power Supply: Two fuse blocks are provided as an auxiliary power source for dealer-installed aftermarket equipment (details on pages 52 and 53).

Park Interlock: The passenger side slide door must be fully closed before the transmission can be shifted out of Park.

Entrance Lighting: The conversion is equipped with entrance lighting that functions in sync with the OEM interior lights (activated by doors, side door or dimmer control).

Hatch Release: Rear hatch is equipped with an interior hatch release. Pull red release to unlatch door. Open door.



Lift Gate Strap (Option): A rear hatch assist strap is available as an option.

Full Size Spare Tire (Option): Interior mounted full side tire. See Figure 1.

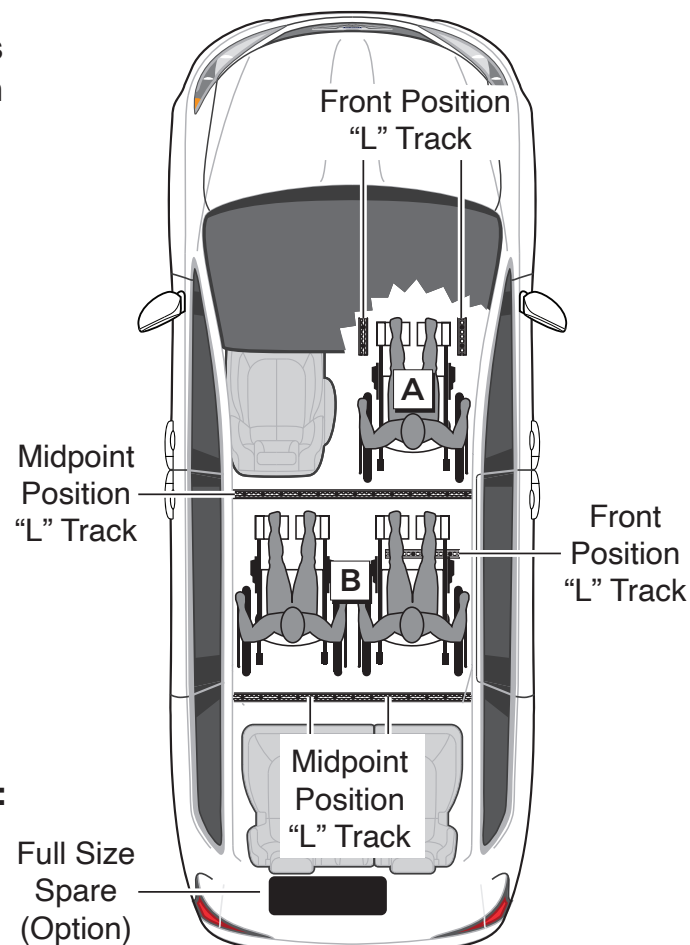


Figure 1

